Ver. 1A

Quick Installation Guide

Super G Wireless USB 2.0 Adapter

Model # AWLL4030

Package Contents:

- Super G USB 2.0 Adapter
- USB 2.0 Extension Cable
- Installation CD
- Quick Installation Guide

Section 1

Installation

The following steps are for Windows 2000/XP. Please refer to the User's Manual on the provided CD for Windows 98SE/ME.

For Windows 2000/XP, you must update your USB driver to USB 2.0

For Windows XP you must install Service Pack 2 prior to installing the USB Adapter.

Note: Whenever the Found New Hardware Wizard appears, click **Cancel** to quit the wizard and continue with the installation.

Step 1 Insert the Wireless USB Adapter to the computer's USB port.

Step 2 Insert the Installation CD into the CD drive and wait for the autorun screen to appear.

Note: If the autorun screen doesn't appear automatically go to **Start**, **Run**, and type **D:\autorun.exe** (where **D** is the letter of your CD drive) and click **OK**.

Step 3 Click **Install Driver (Windows 2000/XP)**.

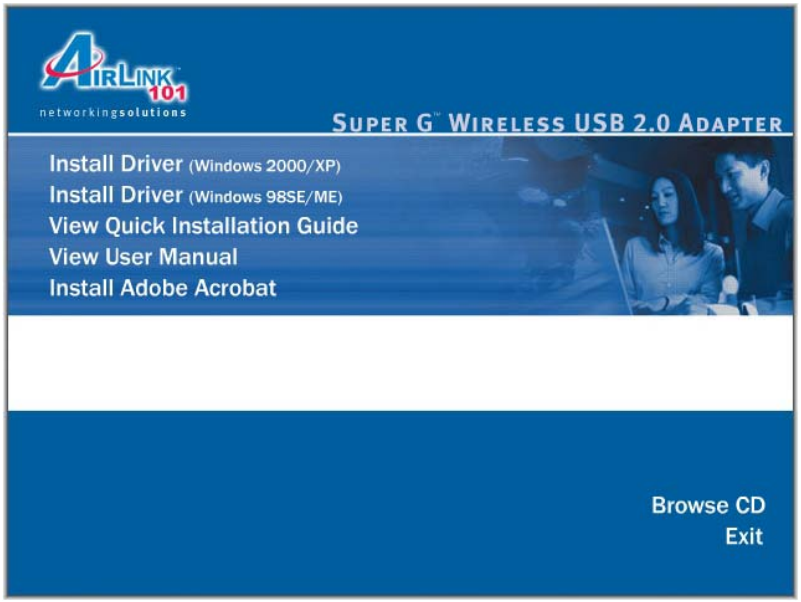

Step 4 Click **Next** at the welcome screen.

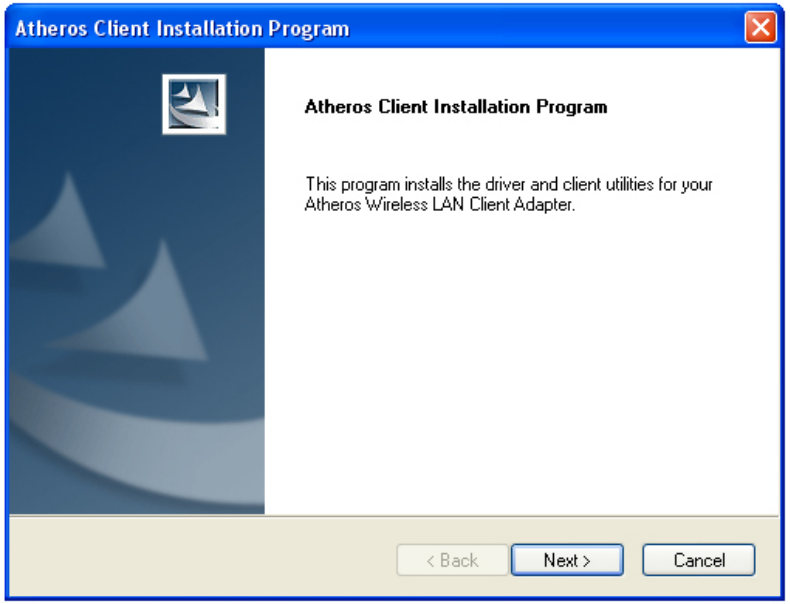
Atheros Client Installation Program
Atheros Client Installation Program
This program installs the driver and client utilities for your Atheros Wireless LAN Client Adapter.
< Back
Next >
Cancel

Step 5 Click **Next** to accept the License Agreement.

Step 6 Verify **Install Client Utilities and Driver** is selected and click **Next**.

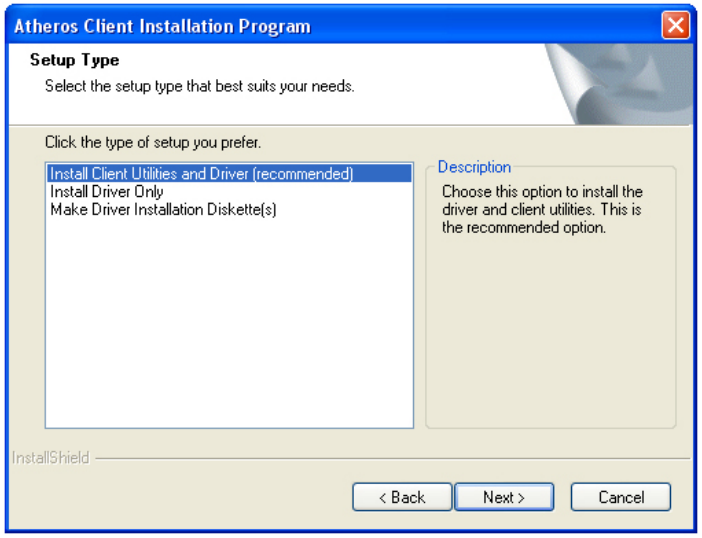
Atheros Client Installation Program
Setup Type
Select the setup type that best suits your needs.
Click the type of setup you prefer.
Install Client Utilities and Driver (recommended)
Install Driver Only
Make Driver Installation Diskette(s)
Description
Choose this option to install the driver and client utilities. This is the recommended option.
InstallShield
< Back
Next >
Cancel

Step 7 Click **Yes** to acknowledge the need for a reboot after the installation.

Step 8 Click **Next** to accept the default Destination Folder.

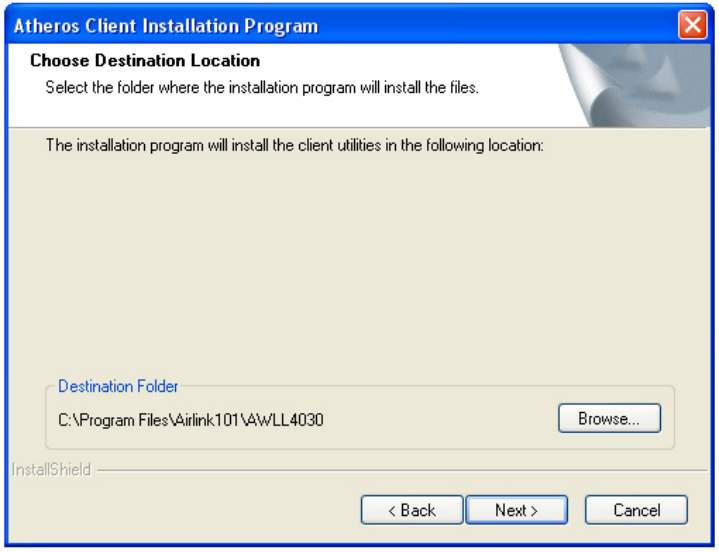
Atheros Client Installation Program
Choose Destination Location
Select the folder where the installation program will install the files.
The installation program will install the client utilities in the following location:
Destination Folder
C:\Program Files\Airlink101\AWLL4030
Browse...
InstallShield
< Back
Next >
Cancel

Step 9 Click **Next** to accept the default Program Folder.

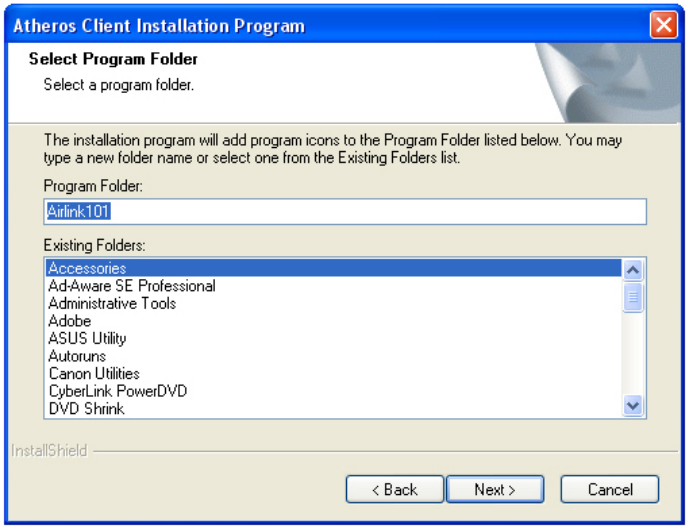

Step 10 Read the notes carefully and click **Next**.

Step 11 Verify **Atheros Client Utlity and Supplicant** is selected and click **Next**.

Step 12 Click **OK** to acknowledge the prompt.

Atheros Client Installation Program
This installation program installs the drivers automatically.
Cancel the Found New Hardware Wizard if it appears and proceed with installation
OK

Continue on Back

Step 13 Click **Continue Anyway** at the Windows Logo prompt for the Bootloader Download. (Click **Yes** for Windows 2000).

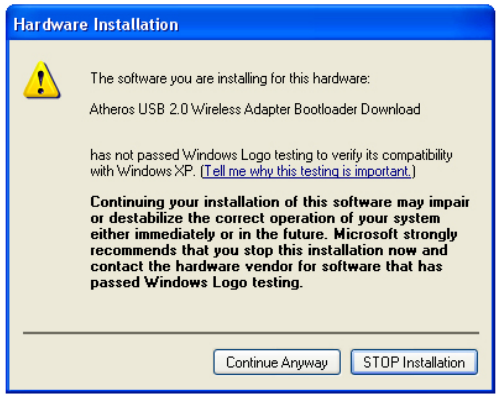
Hardware Installation
The software you are installing for this hardware:
Atheros USB 2.0 Wireless Adapter Bootloader Download
has not passed Windows Logo testing to verify its compatibility with Windows XP. (Tell me why this testing is important.)
Continuing your installation of this software may impair or destabilize the correct operation of your system either immediately or in the future. Microsoft strongly recommends that you stop this installation now and contact the hardware vendor for software that has passed Windows Logo testing.
Continue Anyway
STOP Installation

Step 14 Click **Continue Anyway** at the Windows Logo prompt for the Wireless Network Adapter (Click **Yes** for Windows 2000).

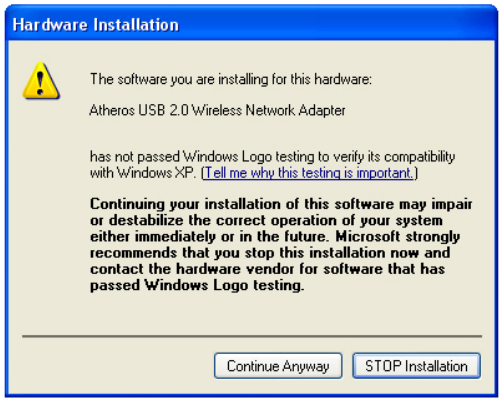
Hardware Installation
The software you are installing for this hardware:
Atheros USB 2.0 Wireless Network Adapter
has not passed Windows Logo testing to verify its compatibility with Windows XP. (Tell me why this testing is important.)
Continuing your installation of this software may impair or destabilize the correct operation of your system either immediately or in the future. Microsoft strongly recommends that you stop this installation now and contact the hardware vendor for software that has passed Windows Logo testing.
Continue Anyway
STOP Installation

Step 15 Click **OK** to reboot your computer.

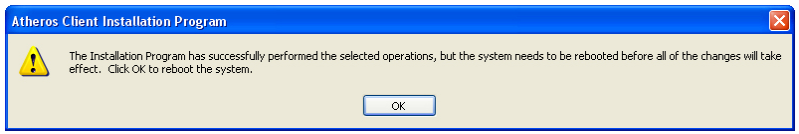
Atheros Client Installation Program
The Installation Program has successfully performed the selected operations, but the system needs to be rebooted before all of the changes will take effect. Click OK to reboot the system.
OK

Section 2

Configure USB Adapter

The following steps are for Windows 98SE/ME/2000/XP.

If you already have signal strength and valid IP address, you do not need to perform the following steps.

Step 1 Start the **Atheros Client Utility** by double-clicking on it from your desktop.

Step 2 If there is no Signal Strength and/or the IP Address is all 0's, select the **Profile Managment** tab.

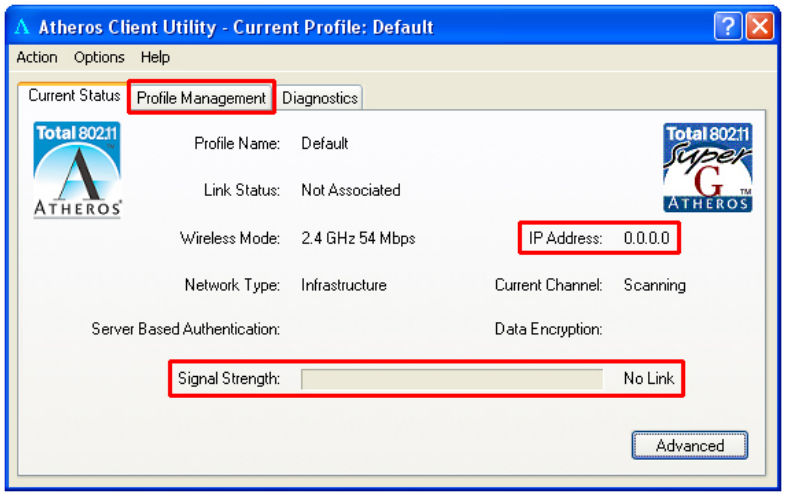

Step 3 Select the **Default** profile and click **Modify**.

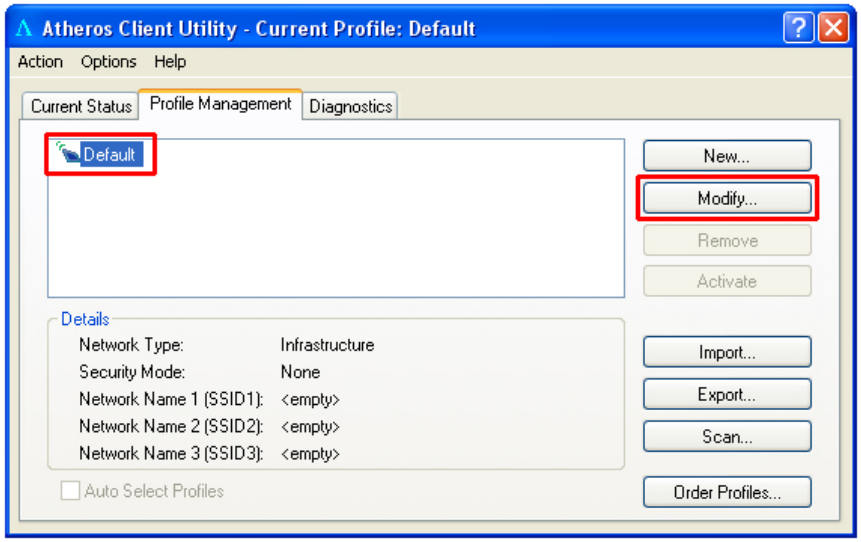

Step 4 Enter the **SSID** (Network Name) that your wireless router/access point is using in the SSID field and click **OK**.

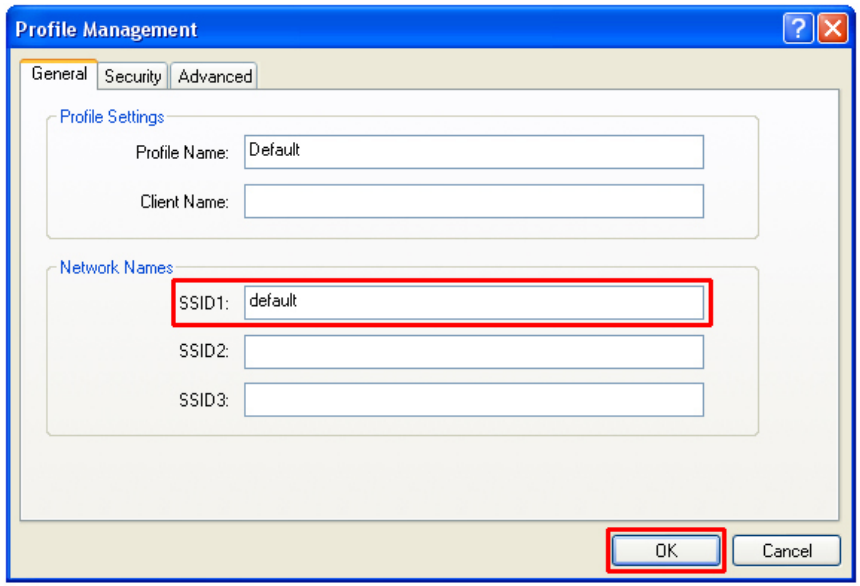

Step 5 Return to the **Current Status** tab and verify that you have signal strength and valid IP address.

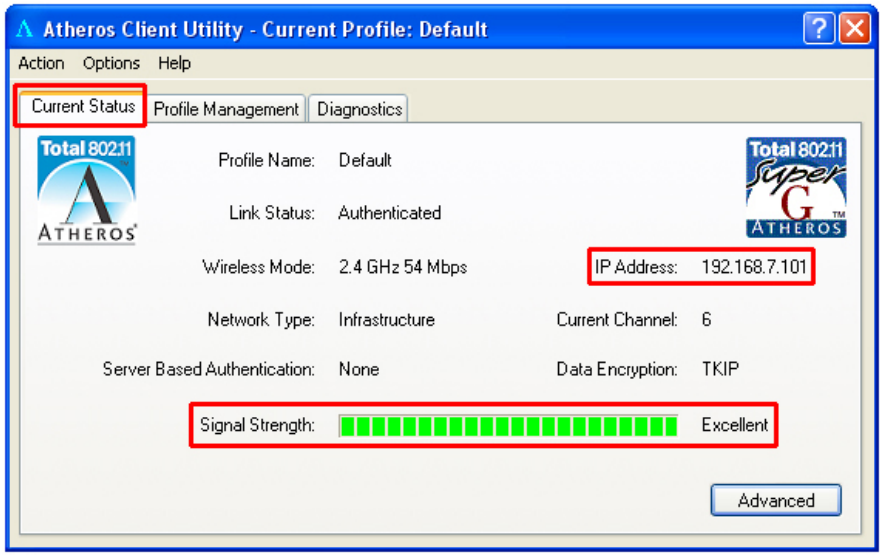

If your wireless router/access point has encryption enabled, you'll need to apply the same encryption settings to the Adapter as well. For information on how to configure encryption, please refer to the User's Manual in the supplied Installation CD.

Section 3

Technical Support

E-mail: support@airlink101.com

Toll Free: 1-888-746-3238

Web Site: www.airlink101.com

*Theoretical maximum wireless signal rate based on IEEE standard 802.11g specifications. Actual data throughput will vary. Network conditions and environmental factors, including volume of network traffic, building materials and construction, mix of wireless products used, radio frequency interference (e.g., cordless telephones and microwaves) as well as network overhead lower actual data throughput rate.

Copyright © 2005 AirLink101. All rights reserved. AirLink101, the stylized AirLink101 logo, specific product designations, and all other words and logos that are identified as trademarks and/or service marks are, unless noted otherwise, the trademarks and service marks of AirLink101. All other product or service names are the property of their respective holders. AirLink101 products are protected under numerous U.S. and foreign patents and pending applications, mask work rights, and copyrights.